


At Ravensby Glass our Colourlite product is manufactured with 6mm Low Iron Toughened however we can also offer 6mm Standard Toughened. This glass conforms to all required EN and BS standards. The difference between standard Float and Low Iron is in the colour purity. Float glass has a slight natural green tinge, which may show through varying degrees in the final colour of your splashback.

Low Iron glass is clearer / less green and offers a more accurate representation of paint colour. We offer all colours from the RAL and British Standard ranges.

**Please Note:** We aim to represent a colour match as close to that as depicted in each range, however there is a degree of tolerance within the paint recipes, therefore a small difference in colour is possible from batch to batch. This should be noted, particularly when ordering additional panels after the initial supplied order.

## SEALING

- It is recommended for splashbacks to use a low modulus silicone for applying to the wall.
- Apply the adhesive in small 2pence amounts on the corner of each panel and join with a thin line.

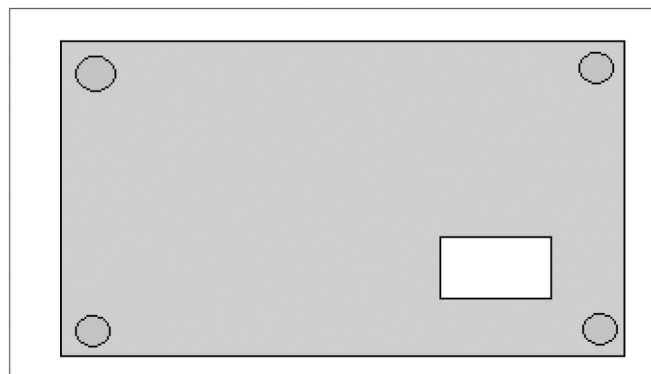

- Do not apply in large circles in the centre of the panel.

## HANDLING


- Painted surface and glass are both susceptible to scratching, chipping, or marking if not handled with care.
- Ensure your hands are clean and dry. Any oil marks may affect the adhesive being used.
- More than one person should carry long or heavy panels.

# *Colourlite Technical Information cont.*


## APPLYING

- Line up the panels carefully.
- When fitting adjacent panels or butting against another item be sure to leave the 2mm expansion gap.
- Once the panels are firmly in place, carefully seal all edges with the sealant.

**Diagram 1**

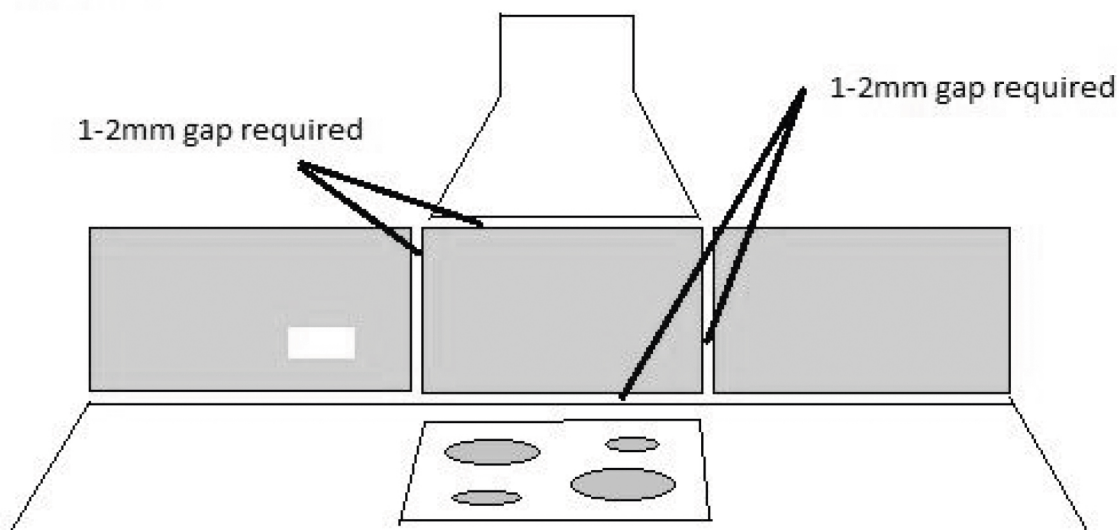

**Diagram 2**

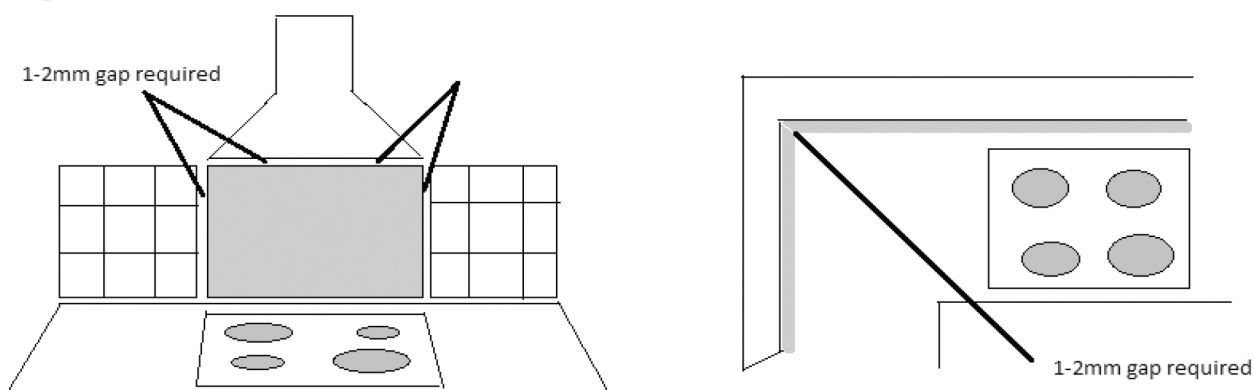

## MAINTENANCE

- To clean and polish the glass surfaces and remove stubborn marks, use fine wire wool.
- Use standard glass cleaner to polish the surface once fitted.